



INSTRUCTION BULLETIN

No. 340494
Machine: 7100
Published: 7-01/00
System: OPTIONS

NOTE: DO NOT DISCARD the Parts List from the Instruction Bulletin. Place the Parts List in the appropriate place in your machine manual for future reference. Retaining the Parts List will make it easier to reorder individual parts and will save you the cost of ordering an entire kit.

NOTE: Numbers in parenthesis () are reference numbers for parts listed in Bill of Materials.

Installation instructions for kit number 391193

SYNOPSIS / PROBLEM:

This kit contains the parts needed to install/replace the storage bag on the model 7100 scrubber.

Please follow step-by-step instructions.

SPECIAL TOOLS / CONSIDERATIONS: Hand drill, 21/64 [8.33 mm] drill bit, 2 in. hole saw

(Estimated time to complete: 1 hour)

PREPARATION:

(Refer to FIG. 1 and 2)

FOR SAFETY: Before leaving or servicing machine, stop on level surface and set parking brake. Then turn off machine and remove key.

INSTALLATION:

(Refer to FIG. 1 and 2)

1. Locate and mark the two mounting hole locations, using the rework drawing in figure 1.
(Refer to FIG. 1)
2. Drill two 21/64 [8.33 mm] holes all the way through the marked hole locations.
(Refer to FIG. 1)
3. Using the two new holes as centerpoints, drill two 2 in. holes from the inside of the machine through the first wall layer. Do not run the hole saw all the way through the machine wall. The 2 in. hole through the inside wall of the machine will only be used to secure the mounting hardware. (Refer to FIG. 2)
4. Mount the bag (1) to the rear of the machine with the mounting bag strip (1), hex screws (3), washers (5) and lock nuts (4). (Refer to FIG. 2)
5. Tighten the bag mounting hardware to 7.6 – 9.9 Nm (5.4 – 7 ft lb). (Refer to FIG. 2)

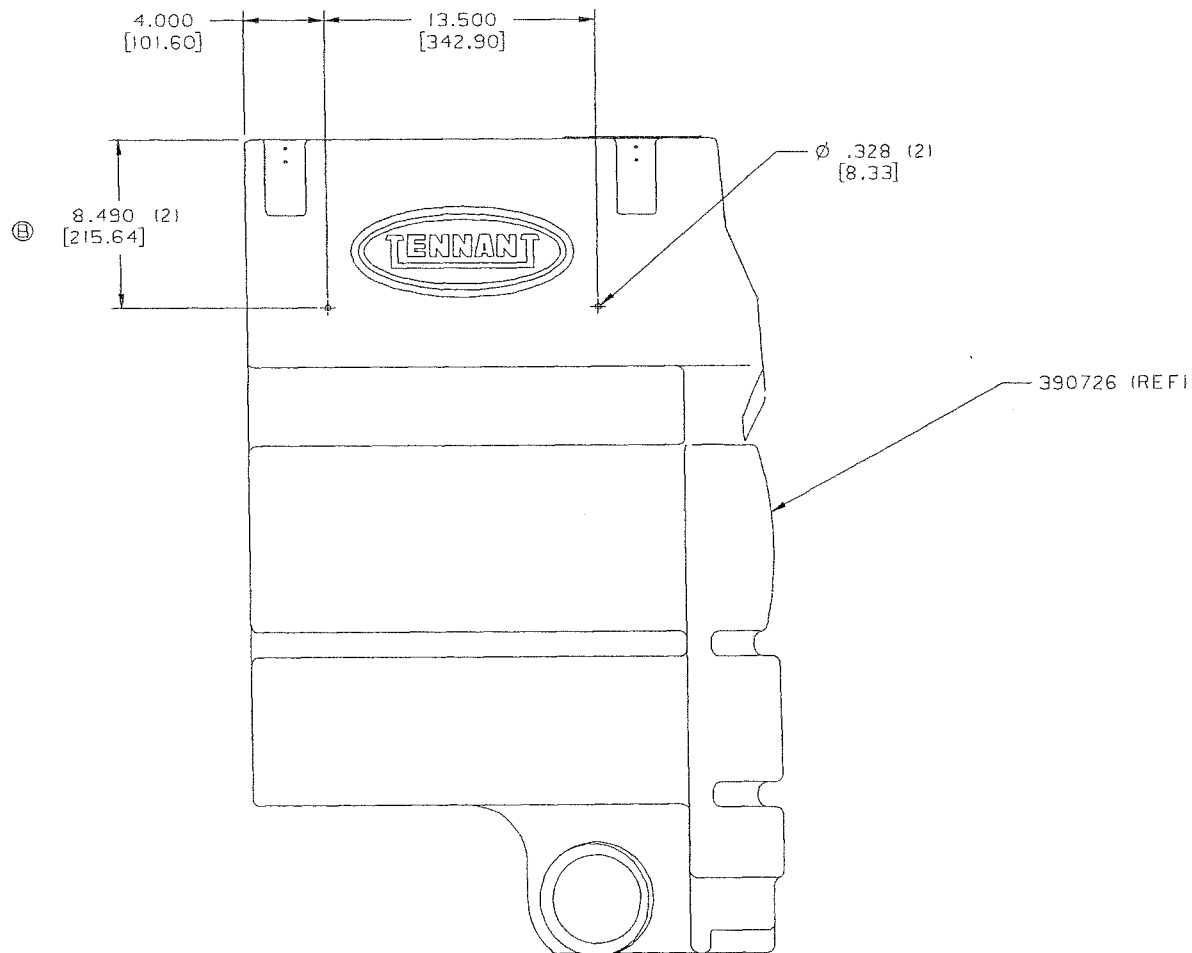


FIG. 1 - MOUNTING HOLE LOCATIONS, BAG, STORAGE

BILL OF MATERIALS FOR STORAGE BAG KIT, 391193

Ref.	TENNANT Part No.	Description	Qty.
1	391258	Bag, power wand	1
2	391243	Strip, mtg, bag	1
3	09011	Screw, hex, M08 X 1.25 X 30, Ss	2
4	08713	Nut, hex, lock M08 X 1.25, NL, Ss	2
5	01685	Washer, flt, 0.31 Ss	4

TENNANT COMPANY
P. O. Box 1452
Minneapolis, MN 55440-1452

Drill 2 in hole through inside layer only, to access tightening hardware

**Tighten mounting hardware to
7.6 - 9.9 Nm [5.5 - 7 ft lb]**

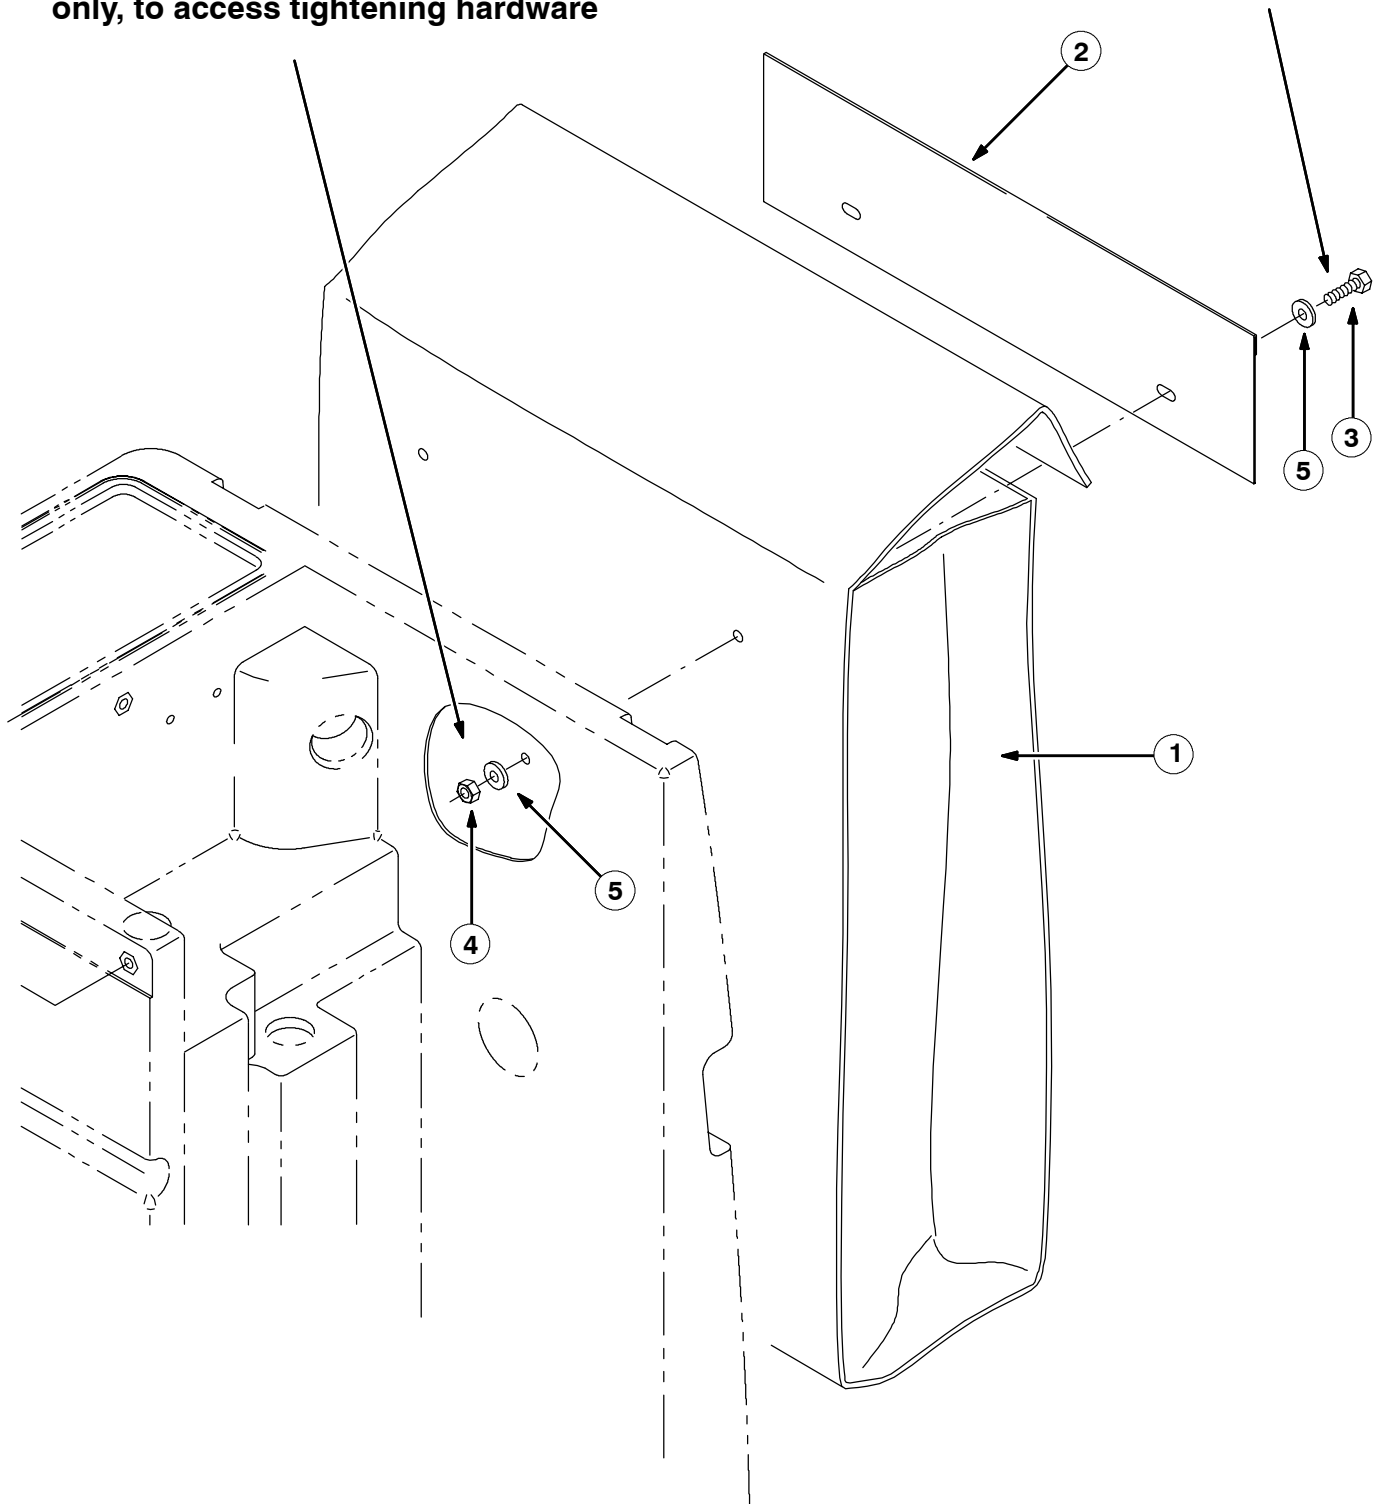


FIG. 2 - STORAGE BAG INSTALLATION