



TECHNICAL SERVICE BULLETIN

No. 003640-001
Machine: 3640
System: Propel

Clutch Adjustment Procedure


SPECIAL INSTRUCTIONS / PARTS ORDERING :

Please follow the procedure instructions.

SPECIAL TOOLS / CONSIDERATIONS:

(Estimated Time to complete: 1/2 hour)

PROCEDURE:

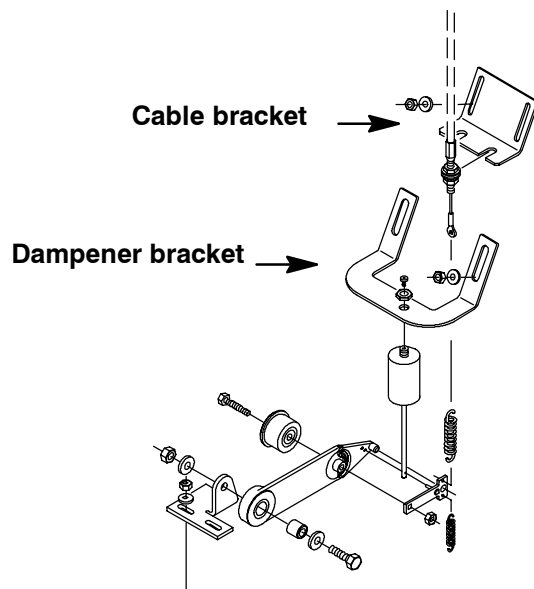

1. Loosen clutch cable and dampener bracket
2. Place the machine transaxle into the neutral position
3. Start engine/motor
4. Raise the clutch cable bracket until belt begins to move, then lower 1/16" and tighten
5. Shut off machine
6. Raise the dampener bracket until the tension is removed from the clutch cable then lower 1/16" and tighten.
7. Restart engine/motor
8. Engage the clutch with the machine in second gear
 - A) Adjust screw on top of dampener accordingly for sensitivity