



CREATING A CLEANER, SAFER, HEALTHIER WORLD.

EQUIPMENT




# T350

## STAND-ON FLOOR SCRUBBER

Gives you the confidence to reduce cleaning costs while delivering high performance cleaning results.

## CONFIDENCE COMES FROM CHOOSING EQUIPMENT THAT HELPS YOU MEET YOUR GOALS

T350 PROVIDES  
CATEGORY LEADING  
PRODUCTIVITY

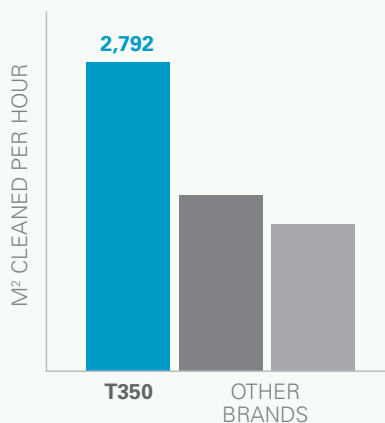

*Tennant practical productivity calculations*



### REDUCE COST TO CLEAN

- **Clean over 2,787 m² per hour** without sacrificing performance on the floor.
- **Maximize uptime** with a durable design, easy-to-access mechanicals, and readily available parts and consumables.
- **Maximize machine usage** with up to 94 minutes between dump and fill cycles and up to 4 hours of battery run time.
- **Simplify training and increase efficiency** with on-board machine instructions for operators.
- **Minimize secondary cleaning operations** with ec-H2O NanoClean® and Severe Environment™ Switch.



### IMPROVE HEALTH AND SAFETY

- **Reduce the risk of slip-and-fall accidents** and ensure soils are removed from the floor with advanced squeegee design.
- **Ensure operator comfort and control** with ergonomics designed for a stand-on machine with easy-to-use steering and controls.



### ENHANCE FACILITY IMAGE

- **Ensure consistent results** with programmable Zone Settings™ that reduce dependence on operator set-up for different surfaces and areas.
- **Incorporate daytime cleaning** with optional Quiet-Mode™ that reduces machine noise levels to as low as 59.7 dBA.
- **Clean a variety of floor surfaces**, including textured and grouted floors, with excellent down pressure and multiple cleaning pad and brush choices.



### MINIMIZE ENVIRONMENTAL IMPACT

- **Reduce water consumption** up to 70% and disposal of cleaning detergents into the waste stream with ec-H2O NanoClean® technology.

# AROUND THE T350



## INNOVATIVE, EXCLUSIVE TECHNOLOGIES

### SMART-FILL™ AUTOMATIC BATTERY WATERING

Smart-Fill™ makes battery maintenance safer by removing the task of checking, opening, and filling flooded batteries.

### PRO-PANEL® LCD TOUCHSCREEN TECHNOLOGY

Deliver predictable cleaning results with operator ID, on-demand tutorial videos and customizable Zone Settings™ with Pro-Panel® technology.

### IRIS® IRIS ASSET MANAGER

Increase productivity, reduce cost to clean and make informed decisions with intelligent insights from IRIS® Asset Manager.

### ec H<sub>2</sub>O® NanoClean

ec-H2O NanoClean® technology electrically converts water into an innovative cleaning solution that cleans effectively, saves money, improves safety, and reduces environmental impact compared to daily cleaning floor chemicals and methods.\*

\*ec-H2O NanoClean® technology is not suitable for all soils, including heavy concentrations of fats and oils. Depending on the type of soil, conventional chemical cleaners may be required.

## TENNANTTRUE® PARTS, SERVICE AND FINANCE SOLUTIONS

- Reduce rework, labor and safety costs by using only TennantTrue parts and service.
- Ensure optimal cleaning performance by selecting a TennantTrue Service program provided by a network of over 40 factory-trained Tennant service representatives.
- Improve uptime by leveraging TennantTrue parts and service.
- Simplify budgeting by bundling TennantTrue service plans, including parts, into the purchase or financing of your machine.

## ENVIRONMENTAL STEWARDSHIP



ec-H2O NanoClean® technology is NFSI (National Floor Safety Institute) Certified



ec-H2O NanoClean technology is registered by NSF International

**Lease. Pre-Owned. Rent. Tennant has flexible options that get you the machines you need, however you need them.**

## T350 STAND-ON FLOOR SCRUBBER

|  | 20 IN / 500 MM<br>SINGLE DISK          | 24 IN / 600 MM<br>DUAL DISK |
|--|--|-----------------------------|
| Cleaning Tool Attachment                               | Insta-Click™ Standard                  |                             |
| Machine Speed  |  |                             |
| Top Scrub and Forward Transport                        | 5.8 km/hr                              |                             |
| Top Reverse Transport                                  | 1.8 km/hr                              |                             |
| Scrubbing Coverage Rate Per Hour                       |  |                             |
| Theoretical Max  | 2,946 m²                               | 3,535 m²                    |
| Conventional - Practical                               | 2,287 m²                               | 2,795 m²                    |
| ec-H2O NanoClean® - Practical                          | 2,351 m²                               | 2,874 m²                    |
| CONTROL PANEL  |  |                             |
| Pro-Membrane™  | Standard                               |                             |
| LCD Pro-Panel® Touch Screen                            | Optional                               |                             |
| BRUSH/PAD DRIVE SYSTEM                                 |  |                             |
| Cleaning Path  | 500 mm                                 | 600 mm                      |
| Pad/Brush RPM  | 215 rpm                                | 275 rpm                     |
| Pad/Brush Down Pressure                                | 28 & 41 kg                             | 29 & 41 kg                  |
| Scrub Motor  | 24 VDC, 0.87 HP / 0.65 kW              |                             |
| SOLUTION/RECOVERY SYSTEM                               |  |                             |
| Solution Tank Capacity                                 | 53 L                                   |                             |
| Recovery Tank Capacity                                 | 70 L                                   |                             |
| Drive Motor  | 24 VDC, 0.64 HP / 0.48 kW              |                             |
| Vacuum Motor   | 24 VDC, 0.62 hp / 0.46 kW              |                             |
| Vacuum Water Lift                                      | 1,067 mm                               |                             |
| CLEANING TECHNOLOGY                                    |  |                             |
| Conventional   | Standard                               |                             |
| ec-H2O NanoClean® Technology                           | Optional                               |                             |
| Conventional Water Flow                                | 0.57 / 1.32 / 1.89 lpm                 |                             |
| ec-H2O NanoClean® Technology Water Flow                | 0.45 / 0.95 / 1.32 lpm                 |                             |
| BATTERY SYSTEM   |  |                             |
| System Voltage / Battery Count                         | 24 Volts / 4                           |                             |
| Batteries  | Wet 210 AH                             |                             |
|  | Wet 240 AH (Provides longest run time) |                             |
|  | Sealed AGM 220AH                       |                             |
| Battery Run Time* (Up to Hours)                        | 3.1                                    | 4.0                         |
| On-Board Charger                                       | Yes                                    | Yes                         |
| Off-Board Charger                                      | Yes                                    | Yes                         |
| DECIBEL RATINGS AT OPERATOR EAR**                      |  |                             |
| Standard - dBA   | 63.7                                   | 64.5                        |
| Quiet-Mode™ - dBA                                      | 59.7                                   | 61.3                        |
| MACHINE DIMENSIONS AND WEIGHTS                         |  |                             |
| Overall Width with Squeegee                            | 765 mm                                 | 793 mm                      |
| Length X Width X Height                                | 1,397 X 673 X 1,245 mm                 |                             |
| Weight (less batteries)                                | 222 kg                                 | 225 kg                      |
| Weight (with batteries)                                | 329 kg                                 | 331 kg                      |
| WARRANTY   |  |                             |
| See your local representative for warranty information |  |                             |

Specifications subject to change without notice.

\* Run times are based on continuous scrubbing run times.

\*\* Sound levels per ISO 11201 as recommended by the American Association of Cleaning Equipment manufacturers & OSHA.

## SEEING IS BELIEVING

For a demonstration or additional information, call

1800 226 843 (FREE CALL) or email [contactus@tennantco.com](mailto:contactus@tennantco.com).

Tennant Australia  
Unit 11, 4 Southridge Street  
Eastern Creek, NSW 2766

T: 1800 226 843 (FREE CALL)  
T: +61 2 9839 9700

Tennant New Zealand  
Unit 5, 103 Cryers Road  
East Tamaki  
Auckland 2013

T: +64 9 253 9013  
F: +64 9 253 9015