

T290

Walk-Behind Scrubber-Dryer

Simple Use for Congested Spaces

Its easy-to-maneuver design, intuitive controls and robust components provide for simple operation and maintenance. The T290 is ideal for cleaning small, congested areas found in retail stores and schools.




A Reliable Clean

Robust construction in a compact scrubber with easy-to-use pad assist or self-propel configuration.



Convenient Features

Avoid kneeling to put the pad/brush on, with hands-free pad/brush replacement with spin-on, spin-off feature.

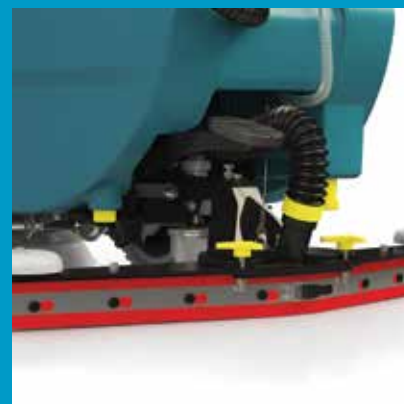

Easy Daily Maintenance

Yellow touch points help reduce breakdowns by simplifying preventative maintenance.

Inside the T290

- 1. Intuitive control panel** with an indicator light when solution tank level is low.
- 2. Easy access** to internal components with tank that tilts back.
- 3. Easy-to-inspect** in-line solution filter.
- 4. Consistent water pick-up** with durable "V" shaped squeegee design and standard Linatex® squeegee blades.
- 5. Optimum cleaning performance,** with self-leveling brush/pad.



T290 Specifications

FEATURE	SPECIFICATION	
	PAD ASSIST	SELF-PROPEL
Cleaning path	500 mm	
Productivity (per hour) theoretical max	1,820 m ² /hr	
Estimated coverage (per hour)*	1,122 m ² /hr	
Scrubbing speed	3.5 kmh	
Scrub head raise/lower	manual with foot pedal	
Brush/pad speed	155 rpm	
Brush/pad pressure	18 kg	
Solution tank capacity	40 L	
Recovery tank capacity	45 L	
Battery run time - up-to hours**	3.0	2.6
Battery voltage	24V (2x12)	
Dimensions (L x W x H)	1,230 x 516 x 960 mm	
Squeegee width	815 mm	
Weight (with heaviest battery)	157 kg	162 kg
Sound level (operator's ear)***	74 dB	

Specifications subject to change without notice.
 * Estimated coverage rates use the practical speed and empty/fill time standards from the 2004 ISSA Cleaning Times handbook.
 ** Run times are based on Continuous Scrubbing Run Times.
 *** Sound levels per ISO 11201 as recommended by the American Association of Cleaning Equipment Manufacturers & OSHA