



INSTRUCTION BULLETIN

No. 340062
Machine: 8200 / 8210
Published: 1-98/00
System: OPTIONS

NOTE: DO NOT DISCARD the Parts List from the Instruction Bulletin. Place the Parts List in the appropriate place in your machine manual for future reference. Retaining the Parts List will make it easier to reorder individual parts and will save you the cost of ordering an entire kit.

NOTE: Numbers in parenthesis () are reference numbers for parts listed in Bill of Materials.

Installation instructions for kit number 364851 and 365176

SYNOPSIS / PROBLEM:

This kit contains the parts needed to install a Grammer seat (option) on the model 8200 / 8210 sweeper/scrubber.

Please follow step-by-step instructions.

(Estimated time to complete: 1 hour)

INSTALLATION OF GRAMMER SEAT:

(Refer to FIG. 1)

1. Remove the seat mounting plate from the seat support and retain all hardware.
(Refer to FIG. 1)

FOR SAFETY: Before leaving or servicing machine, stop on level surface and set parking brake. Then turn off machine and remove key.

2. Use the new seat rails and hardware (4) and (5) to mount the seat (1) to the mounting plate (3). The screw and washers install into the weld nuts on the set rails from the underside of the mounting plate. Tighten all hardware. (Refer to FIG. 1)
3. Install the arm rest (2) onto the seat with the hardware from the arm rest assembly.
(Refer to FIG. 1)
4. Use the hardware retained in Step 1 to install the seat and mounting plate onto the seat support. Tighten all hardware. (Refer to FIG. 1)
5. Adjust seat to the desired position.

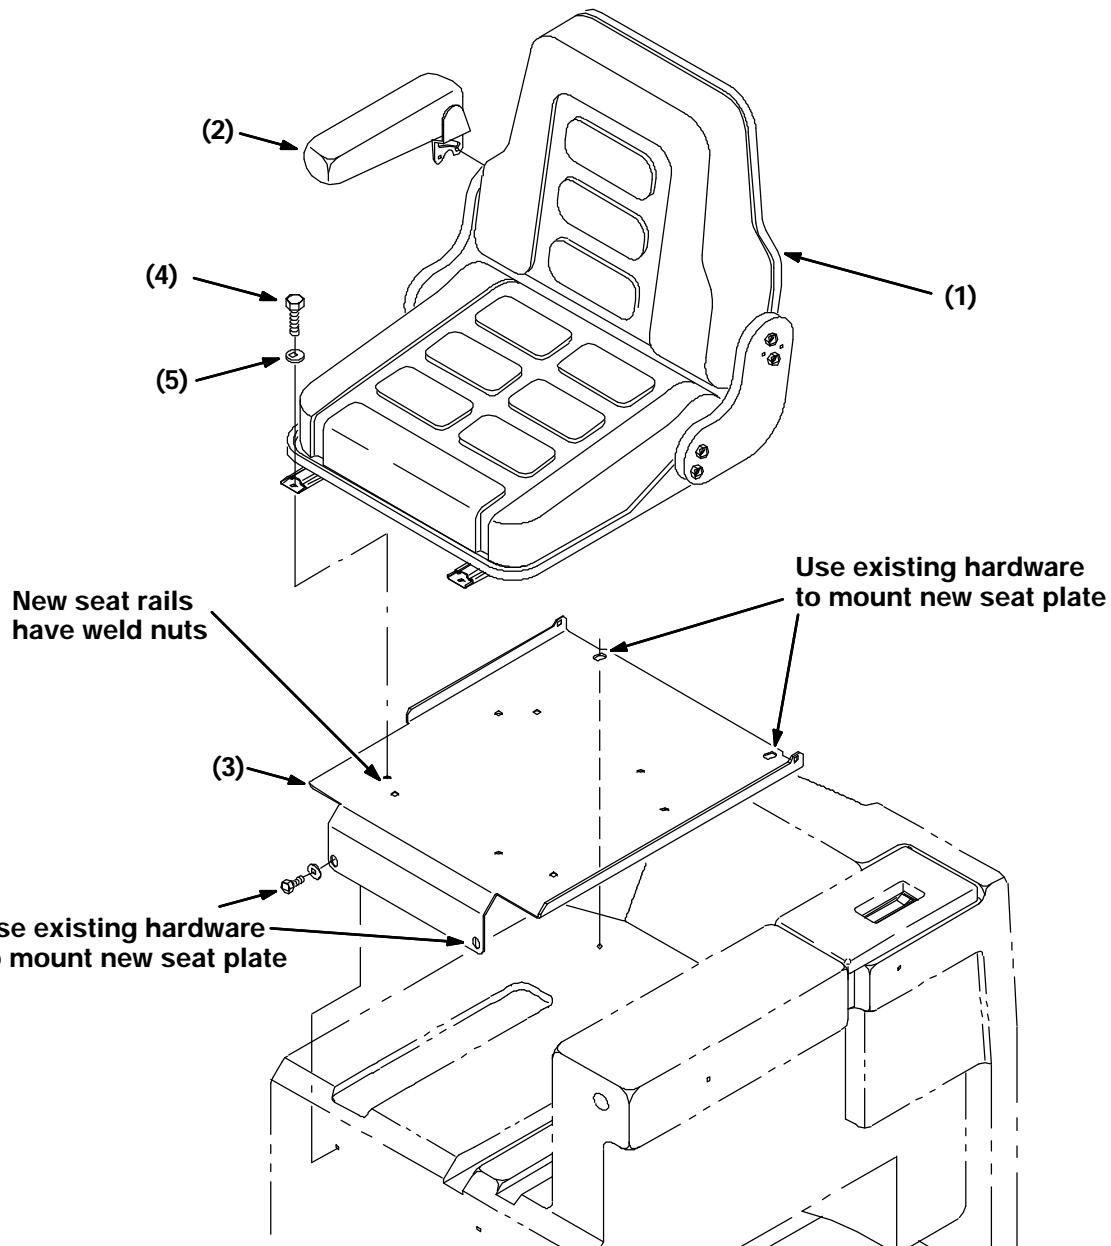


FIG. 1 - Installation of Grammer Seat

BILL OF MATERIALS FOR KIT NUMBER 364851

Ref.	TENNANT Part No.	Description	Qty.
1	53845	Seat, Grammer, GS-12	1
2	71477	Arm rest assmy, RH	1
3	364559	Plate, mtg, seat	1
4	15675	Screw, HEXSSM 8 x 1.25 16	4
5	01685	Washer, flat 0.31 SS	4

TENNANT COMPANY
P. O. Box 1452
Minneapolis, MN 55440-1452